

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H05K 1/00	A1	(11) International Publication Number: WO 95/10170 (43) International Publication Date: 13 April 1995 (13.04.95)
(21) International Application Number: PCT/US94/10735 (22) International Filing Date: 21 September 1994 (21.09.94) (30) Priority Data: 08/131,257 1 October 1993 (01.10.93) US (71) Applicant: BOURNS, INC. [US/US]; 1200 Columbia Avenue, Riverside, CA 92507 (US). (72) Inventors: YUMIBE, George; 16332 Del Mar Lane, Huntington Beach, CA 92649 (US). GRATZINGER, Paul; 29124 Maltby Avenue, Moreno Valley, CA 92360 (US). NGUYEN, Thanh; 30 Mill Valley Road, Pomona, CA 91786 (US). WISNER, Duane; 610 Massachusetts Avenue, Riverside, CA 92507 (US). (74) Agents: KLEIN, Howard, J. et al.; Klein & Szekeres, Suite 700, 4199 Campus Drive, Irvine, CA 92715 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **COMPLIANT STACKING CONNECTOR FOR PRINTED CIRCUIT BOARDS**

(57) Abstract

A device for electrically connecting the conductors on a first PC board (30) to the conductors on a second PC board (34) includes a housing (12) having a mounting surface for mounting on the first board, an exposed surface (18) opposite the mounting surface (20), and a pair of opposed side walls (16). A plurality of channels (22) open through the exposed surface, each having an interior. A compliant contact element (26) is disposed in each channel (22). The contact element (26) includes an end portion formed as a termination pad on the mounting surface (20), a lead portion (42) extending from the first end portion along an adjacent side wall toward the exposed surface and then through the adjacent side wall and the interior surface of that wall into the interior of one of the channels (22), a supporting portion (44, 46) extending within the interior of the channel, and an electrical contacts portion (48) flexibly joined to the supporting portion (44, 46) and extending outwardly from the channel beyond the exposed surface.

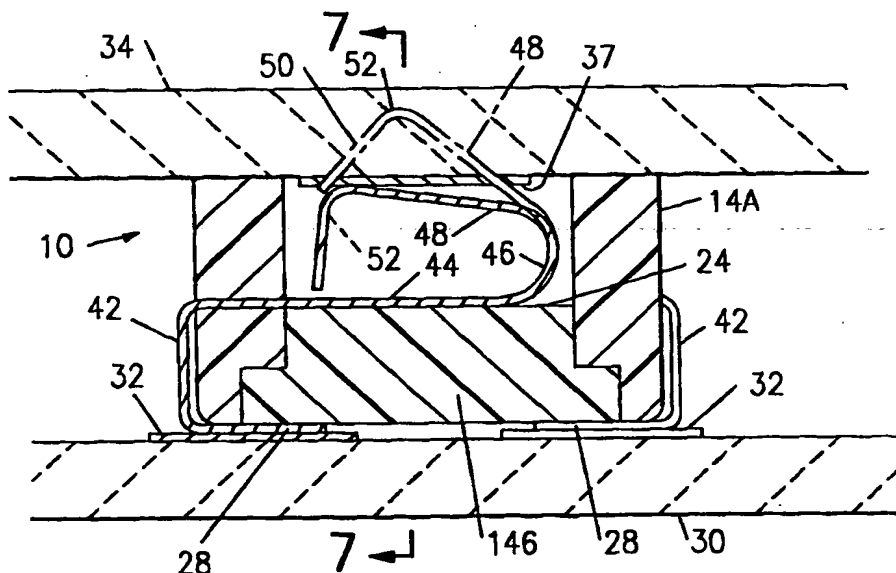**BEST AVAILABLE COPY**

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

COMPLIANT STACKING CONNECTOR FOR PRINTED CIRCUIT BOARDSBackground of the Invention

The present invention relates generally to the field of electrical connectors. More particularly, this invention relates to devices that provide electrical connection between the respective conductors on first and second adjacent substrates, such as printed circuit boards ("PC" boards).

The trend toward increased miniaturization and more compact packaging of components and assemblies in the electronics industry has led to the development of connectors for electrically connecting the respective conductors on adjacent substrates, such as the conductive traces on adjacent PC boards.

A particular application for such connector devices is for providing electrical connection between adjacent PC boards that are removably stacked relative to one another; that is, removably mounted in a closely adjacent parallel relationship. One typical type of connector for such an application employs resilient or compliant contact elements to provide the electrical connection between the respective conductive elements on the adjacent PC boards. Specific examples of this general type of connector are disclosed in the

following U.S. patents: 3,795,037 - Luttmer; 4,199,209 - Cherian et al.; 4,295,700 - Sado; 4,505,529 - Barkus; 4,511,196 - Schuler et al.; 4,738,625 - Burton et al.; 4,806,104 - Cabourne; 4,813,129 - Karnezos; 4,983,126 - Busse et al; 4,998,886 - Werner; 5,016,192 - Chapin et al.; 5,069,627 - Buck et al.; 5,139,427 - Boyd et al.; 5,147,207 - Mowry; 5,152,695 - Grabbe et al.; 5,160,268 - Hakamian; 5,173,055 - Grabbe; and 5,228,861 - Grabbe.

In designing PC board connectors, there are a

number of important considerations. For example, to optimize space utilization, it is desirable to minimize the space between adjacent boards. Thus, the thickness or "profile" of the connector must be minimized. Also, 5 since the trend is toward more ever smaller component sizes and increased density of the arrangement of the components and conductors on the boards, it is necessary to provide a denser arrangement of conductive contact elements in the connectors; that is, an 10 increased number of contacts in a given area. Often, this means decreasing the size of the contact elements themselves. Such downsizing of the contact elements, however, frequently degrades their durability and useful lifetimes, due to decreased structural strength. 15 Thus, the design criteria of minimizing size and maintaining durability typically operate at cross purposes, resulting in the compromising of both criteria.

Furthermore, there will be often be slight 20 variations in the nominal spacing between adjacent PC boards, thereby requiring the contact elements to provide positive electrical contact regardless of such variations. To do this, the contact elements must have a sufficient degree of deflection or travel to bridge 25 inter-board gaps of varying distances. One solution to this problem is to provide a structure in which the connector has some freedom to move or "float" between the boards, as disclosed in U.S. Patent No. 5,160,268 - Hakamian. One drawback to this approach, however, is a 30 relatively complex structure, that may be relatively costly to manufacture and difficult to install in some applications.

Another drawback with many prior art connectors is

difficulty, awkwardness, or lack of flexibility in installation. Specifically, many such prior art connectors require specialized installation or mounting structures, and many do not easily permit (or even
5 permit at all) relative lateral movement, or sliding, between two adjacent PC boards. In either case, the installation and removal of interconnected PC boards may require either additional clearance space, or more complex, time-consuming procedures.

10 Furthermore, many of the prior art connectors do not perform a wiping action against the stationary contacts of the adjacent PC board, thereby allowing debris and oxidation to accumulate, and thus degrading the performance of the connector over time.

15 Finally, many of the prior art connectors are relatively complex in construction, and therefore relatively expensive to manufacture.

Therefore, it would be a significant advancement in the art to provide a PC board connector that
20 combines a low profile, a high contact element density, good contact element durability, extended contact element travel with a wiping action, simplicity and flexibility in installation, and economy of manufacture.

25 Summary of the Invention

Broadly, the present invention is a PC board connector, comprising a housing with terminal leads that are conductively attachable to conductive trace terminations on a first PC board, and that contains a
30 multiplicity of compliant spring contact elements, each of which is individually mounted in the housing for resilient, wiping contact with a stationary contact pad on an adjacent PC board. The contact elements are

integral extensions of the terminal leads, each of which extends into the housing and is bent so as to have an intermediate portion that normally extends outwardly from the plane of the exposed surface of the housing opposite the PC board on which the housing is mounted. The bent shape of each contact element provides it with a resilient spring action, whereby the contact element is biased against the stationary contact pad.

10 In a preferred embodiment, the contact elements are disposed in a linear array in the housing, each extending outwardly from an individual slot-like channel in the exposed housing surface. Each contact element is, as mentioned above, an extension of a
15 terminal lead, and the terminal leads are arranged along opposed lateral sides of the housing in a staggered relationship for higher contact element density. Specifically, in a surface mount embodiment, each terminal lead has a first end formed as a
20 termination pad on the board-mounted surface (underside) of the housing. From the pad, the lead extends part way up the adjacent lateral side wall of the housing, and then through the wall into the bottom of the channel in the interior of the housing to form
25 the spring contact element. In the interior of the housing, the contact element has a supporting portion or base that extends along the bottom of the channel toward the interior of the opposite lateral side wall. Before reaching the opposite wall, the contact is bent
30 in an arcuate bend to form a resilient intermediate portion that extends, at an acute angle with the base, outwardly from the opening of the channel in the exposed surface of the housing. The contact element is

then bent back, in a right angle or a slightly acute angle, toward the exposed surface of the housing, to form a second end or "tail" that extends back slightly into the channel as a guide for maintaining the optimum
5 alignment of the contact element with respect to the channel.

The angular junction between the intermediate portion of the contact element and the tail forms a rounded "knuckle" that provides the major contact
10 surface for establishing a conductive, wiping contact with a stationary contact pad on a second PC board placed adjacent to the first PC board.

When the second PC board is placed adjacent to the first PC board, each of the stationary contact pads on
15 the second board is placed in a resilient or compliant compression contact with the raised knuckle surface of a corresponding one of the compliant .mb7contact elements, thereby resiliently compressing the compliant contact elements into the corresponding channels in the
20 housing. The compression of the compliant contact elements creates a spring-biased loading that urges them into a secure electrical contact with their corresponding stationary contact pads.

The bent configuration of the compliant contact
25 elements provides sufficient travel to allow the accommodation of varying distances between adjacent PC boards. In addition, the formation of the compliant contact elements as integral extensions of the terminal leads provides structural strength, durability,
30 compactness, and simplicity of manufacture.

In a variation of the preferred embodiment, there is a clearance space between the base of the contact element and the bottom of the channel. This clearance

space allows both the base and the intermediate portion of the contact element to bend, thereby providing an additional amount of travel for the contact element, as well as additional contact force.

5 The present invention may be used to provide electrical contact either with exposed stationary contact pads on the second board, or with contact pads that are enclosed in a second housing and that are accessed through slots in the exposed surface of the
10 second housing.

 In an alternative embodiment, the compliant contact element comprises a resilient conductive element configured as a finger protruding from an aperture in the exposed surface of the .mb8
15 housing. The finger is formed in the intermediate portion of a continuous terminal lead, at least one end of which extends through the side wall of the housing, and then down onto the underside (mounting side) of the housing to form a lead termination pad for attachment
20 to the first PC board. The terminal lead is secured within the housing so that both sides of the finger are, in effect, cantilevered, to provide the compliant spring action described above.

 The present invention provides a unique
25 combination of a number of advantages. For example, as mentioned above, the invention combines high contact density, good contact strength and durability, excellent adaptability to variances in nominal inter-board spacing, compact dimensions, and simplicity of
30 manufacture. These and other advantages will be better appreciated from the detailed description that follows.

Brief Description of the Drawings

Figure 1 is top perspective view of a compliant

contact connector in accordance with a preferred embodiment of the present invention;

Figure 2 is an exploded side elevational view of first and second PC boards prior to mechanical and electrical interconnection, the first (lower) PC board having mounted on it the connector of Figure 1;

Figure 3a is a plan view, taken along line 3a - 3a of Figure 2, of the second (upper) PC board shown in Figure 2;

Figure 3b is a plan view, taken along line 3b - 3b of Figure 2, of the first (lower) PC board shown in Figure 2, showing the connector of Figure 1 mounted thereon;

Figure 4 is a side elevational view, similar to that of Figure 2, showing the first and second PC boards interconnected;

Figure 5 is an enlarged cross-sectional view taken along line 5 - 5 of Figure 3b, showing, in phantom, the second PC board and the position of a compliant contact element in the connector when the second PC board is installed adjacent to the first PC board, as shown in Figure 4;

Figure 6 is a bottom plan view of the connector shown in Figure 1;

Figure 7 is a cross-sectional view taken along line 7 - 7 of Figure 5;

Figure 8 is a view similar to that of Figure 5, showing a variation of the preferred embodiment of the connector;

Figure 9 is cross-sectional view, similar to that of Figure 5, but showing the compliant contact element in contact with a partially enclosed stationary contact pad on the second PC board;

Figure 10 is a top perspective view of a compliant contact connector in accordance with an alternative embodiment of the present invention; and

Figure 11 is a cross-sectional view, taken along line 11 of Figure 10, showing the placement of a second PC board adjacent to the first PC board on which the connector is mounted, and showing, in phantom, the deflection of a compliant contact element in response to the interconnection of the first and second boards.

10 Detailed Description of the Invention

Referring now to the drawings, Figures 1 through 7 show a compliant contact connector 10, in accordance with a preferred embodiment of the invention. The connector 10 includes a housing 12, formed of a suitable insulative material, such as a molded thermoplastic. The housing 12 may be formed as one unitary piece, or, as shown in Figure 5, it may comprise a first and second housing portions 14a, 14b, respectively. The first housing portion 14a includes side walls 16 and an exposed apertured surface 18, which, for purposes of the description herein, may be termed the "upper" surface (although the orientation in practice will vary). The second housing portion 14b forms a mounting surface, or "lower" surface 20, opposite the upper surface 18. The lower surface 20, as best shown in Figure 6, is substantially planar, so as to be mountable substantially flush against a PC board, as will be described below.

The first housing portion 14a has a linear array of laterally-extending slot-like apertures or channels 22 that extend through the upper surface 18 into the interior of the housing 12. Each channel has an interior bottom surface 24 defined by the planar

interior surface of the second housing portion 14b, as shown in Figure 5. As will be described in detail below, each of the channels 22 accommodates a single corresponding compliant contact element 26, and each of the contact elements 26 is integral with a termination pad 28 on the lower surface 20.

As will be described in detail below, the connector 10 is used to provide electrical interconnection between two adjacent PC boards. Thus, as shown in Figures 2, 3a, 3b, and 4, the connector 10 is mounted on a first PC board 30 so that the termination pads 28 on the lower surface 20 thereof make electrical contact with a first plurality of conductive traces 32 printed thereon. When a second PC board 34, having printed thereon a second plurality of conductive traces 36, each terminating in a stationary contact pad 37, is brought adjacent to the first board 30 and mechanically connected thereto (such as by screws 38 and spacer nuts 40, one each of which is shown in the drawings), each of the compliant contact elements 26 protruding from the upper surface 18 of the connector 10 will establish electrical contact with a corresponding one of the stationary contact pads 37.

As shown in Figures 5 and 7, each of the compliant contact elements 26 is an integral extension of a terminal lead 42. The terminal leads 42 are arranged along opposed lateral sides 16 of the housing 12, in a staggered relationship for closer contact element spacing and thus higher contact element density. In the surface mount embodiment shown, each terminal lead 42 has a first end portion formed as one of the termination pads 28 on the mounting or lower surface 20 of the connector housing 12. Alternatively, the first

end portions of the terminal leads may be configured for insertion through holes in the PC board. From the pad 28, each lead 42 extends part way up the adjacent housing lateral side wall 16, and then through the side wall into and along the bottom surface 24 of a channel 22, forming a supporting portion or base 44 for the compliant contact element 26. The base 44 extends toward the interior surface of the opposite lateral side wall 16, but before reaching the opposite wall, the contact element is formed into an arcuate bend 46 to form a resilient intermediate portion 48 that extends, at an acute angle with the base 44, outwardly from the opening of the channel 22 in the upper surface 18 of the housing 12. The contact element is then bent back, at a right angle or a slightly acute angle, toward the upper housing surface 18, to form a second end portion or "tail" 50 that extends back slightly into the channel 22 as a guide for maintaining the optimum alignment of the contact element 26 with respect to the channel 22.

The tail 50 and the intermediate portion 48 form an electrical contact portion, with the angular junction between the tail 50 and the intermediate portion 48 of the contact element 26 formed as a rounded protuberance or "knuckle" 52 that provides the major contact surface for establishing a wiping conductive contact with one of the stationary contact pads 37 on the second PC board 34.

When the second PC board 34 is placed adjacent to the first PC board 30, each of the stationary contact pads 37 on the second board 34 is placed in a resilient or compliant compression contact with the protruding knuckle 52 of a corresponding one of the compliant

contact elements 26, thereby resiliently compressing the compliant contact elements 26 into the corresponding channels 22 in the housing 12. The compression of the compliant contact elements 26
5 creates a spring-biased loading that urges them into a secure electrical contact with their corresponding stationary contact pads 37.

The bent configuration of the compliant contact elements 26 provides sufficient travel to allow the
10 accommodation of varying distances between adjacent PC boards. In addition, the formation of the compliant contact elements 26 as integral extensions of the terminal leads 42 provides structural strength, durability, compactness, and simplicity of manufacture.

15 In a variation of the preferred embodiment, shown in Figure 8, the interior of a connector 10' is configured so that there is a clearance space 54 between the base 44 of the contact element 26 and the bottom surface 24 of the channel 22. This clearance
20 space 54 allows both the base 44 and the intermediate portion 48 of the contact element 26 to bend, thereby providing an additional amount of travel for the contact element. In this modification, a resilient spring action is provided not only at the arcuate bend
25 46, but also at the juncture between the base portion 44 and the interior of the housing. This "double spring action" increases the compliance of the connector element, and can, in some applications, increase its useful lifetime.

30 The present invention may be used to provide electrical contact either with exposed stationary contact pads 37 on the second board 34, as described above, or with partially enclosed stationary contact

pads 56, as shown in Figure 9. In this configuration, the stationary contact pads 56 are partially enclosed in a second housing 58, and they are each accessed through a slot 60 in a slotted portion 62 of the second housing 58. As shown in Figure 9, each of the partially enclosed contact pads 56 may be an exposed portion of a continuous conductive strip, at least one of the ends of which may be bent around to the underside (mounting surface) 64 of the second housing 58 to form a termination pad 66.

In the configuration shown in Figure 9, a modified connector 10" is employed, which includes a housing comprising an exterior housing portion 67a and an interior housing portion 67b. The exterior housing portion 67a forms the sides and the lateral portions of the lower (mounting) surface of the connector 10". The exterior housing portion 67a also defines a pair of opposed recessed shoulders 68 on opposite ends of each channel 22. The shoulders 68 provide a surface for receiving a corresponding mating surface on the slotted portion 62 of the second housing 58, thereby facilitating the proper alignment of the contact elements 26 in the connector 10" with the corresponding contact pads 56 in the second housing 58.

The interior housing portion 67b provides the central portion of the lower (mounting) surface of the connector 10", while also providing an internal support surface for the contact element base portion 44.

An alternative embodiment of the invention is shown in Figures 10 and 11. In accordance with this alternative embodiment, which may be used in applications where a lower contact density is desired, a connector 70 comprises a one-piece molded plastic

housing 72 having a lower or mounting surface 74 and an upper or exposed surface 76 joined by a plurality of sides 78. The upper surface 76 is provided with one or more apertures or channels 80 advantageously in
5 alignment as shown.

In this alternative embodiment, a compliant contact element 82 is employed that comprises a resilient conductive element configured as a round-tipped finger 84 protruding from each of the channels
10 80 in the exposed surface 76 of the housing 72. The finger 84 is formed in the intermediate portion of a continuous terminal lead 86, at least one end 88 of which extends through an adjacent side 78 of the housing 72, and then down onto the underside (mounting
15 side) 74 of the housing 72 to form a lead termination pad 90 for attachment to the first PC board 30.

The terminal lead 86 is secured within the housing 72 so that both sides of the finger 84 are, in effect, cantilevered, to provide the compliant spring action
20 described above with respect to the preferred embodiment. Specifically, each of the channels 80 extends into the interior of the housing 72 and communicates with a hollowed out cavity 92 in the bottom portion thereof. The width of the cavity 92 is
25 greater than that of the channel 80, so that the interior wall surfaces of the housing 72 form an opposed pair of horizontal shoulders 94 opposite sides of the channel 80. Each of the leads 86 is molded into the housing 70, and enters the interior of the housing
30 at an entry point 96 in each of two opposed sides of the housing. Inside the housing, the leads 86 form an opposed pair of supporting or base portions 98, the upper sides of which seat against the shoulders 94, and

the lower sides of which are unconstrained, thereby allowing the supporting portions 98 to flex inwardly into the cavity 92.

When a second PC board 34 is installed adjacent to
5 the first PC board 30 on which the connector 70 is mounted, each of the stationary contact pads 37 on the second board 34 establishes electrical contact with the rounded end of a corresponding one of the fingers 84. In doing so, the stationary contact pad 37 is placed in
10 a resilient or compliant compression contact with the tip of the finger 84, thereby resiliently compressing the compliant contact element 82 into its corresponding channel 80. The flexing of the cantilevered support portions 98 of the contact elements 82 creates the
15 above-described spring-biased loading that establishes a secure electrical contact between each of the contact elements 82 and its associated stationary contact pad 37.

From the foregoing description, it can be seen
20 that the present invention provides a unique combination of advantages as compared with prior art PC board connectors. Many of these advantages have been mentioned above, but, to summarize, they include a low profile, high contact density (at least for the
25 preferred embodiment), good contact element durability, extended contact element travel (to accommodate variations in PC board spacing), good wiping action against the stationary contact pads, simplicity and flexibility in installation, and simplicity and economy
30 of manufacture. Furthermore, the present invention requires no specialized installation or mounting structures, and (especially, but not exclusively, in the alternative embodiment of Figures 10 and 11) it

permits relative lateral movement or sliding between two adjacent PC boards, thereby providing further flexibility in installation.

While a preferred embodiment (with several
5 variations) and a single alternative embodiment have been described, it should be appreciated that further modifications and variations may suggest themselves to those skilled in the pertinent arts. For example, the number of compliant contact elements in a connector may
10 be varied to suit different applications, as can be the arrangement of the contact elements. As mentioned above, the terminal leads (the extensions of which form the compliant contact elements) can be configured both for surface mount applications and for through-board
15 applications. The housing itself can assume a wide variety of sizes and configurations to fit a multitude of applications. Furthermore, the precise shape of the compliant contact elements themselves may be varied from the idealized forms shown in the drawings, if
20 such variations are consistent with the concept of a highly compliant contact element that is an integral extension of the terminal lead. These and other variations and modifications that may suggest themselves to those of ordinary skill in the art should
25 be considered within the spirit and scope of the invention, as defined in the claims that follow.

WHAT IS CLAIMED IS:

1. A device for electrically connecting a first plurality of conductors on a first printed circuit board to a second plurality of conductors on a second printed circuit board, comprising:
 - a housing having a mounting surface configured to be mounted on the first printed circuit board, an exposed surface opposite the mounting surface, and at least one opposed pair of side walls extending between the mounting surface and the exposed surface, the side walls each having an interior wall surface;
 - a plurality of channels opening through the exposed surface, each of the channels having an interior defined between the interior wall surfaces of the side walls; and
 - a plurality of compliant contact elements mounted in the housing, each of the contact elements formed as an integral conductive element, comprising:
 - a first end portion disposed adjacent to the mounting surface so as to establish electrical contact with one of the first plurality of conductors when the housing is mounted on the first printed circuit board;
 - a lead portion extending from the first end portion along an adjacent one of the side walls toward the exposed surface and then through the adjacent side wall and the interior wall surface of that wall into the interior of an adjacent one of the channels;
 - a supporting portion extending within the interior of the adjacent one of the channels; and
 - an electrical contact portion flexibly

joined to the supporting portion and extending outwardly from the adjacent one of the channels beyond the exposed surface so as to establish electrical contact with a corresponding one of the second plurality of conductors when the second printed circuit board is located adjacent to the first printed circuit board.

2. The device of Claim 1, wherein each of the channels has a bottom interior surface; wherein each of the compliant contact elements includes a supporting portion extending substantially parallel to the bottom interior surface; and wherein the electrical contact portion forms an acute angle with the supporting portion.

3. The device of Claim 2, wherein the electrical contact portion comprises:

an intermediate portion joined to the supporting portion along an arcuate bend; and
a second end portion joined to the intermediate portion at an angle that is approximately equal to, or slightly less than, a right angle, so as to form a rounded protuberance at the juncture between the intermediate portion and the second end portion, the rounded protuberance providing means for establishing the electrical contact with the corresponding one of the second plurality of conductors.

4. The device of Claim 2, wherein the supporting portion is substantially in contact with the bottom interior surface.

5. The device of Claim 2, wherein the supporting portion is spaced from the bottom interior surface.

6. The device of Claim 2, wherein the plurality

of channels comprises a linear array of at least two laterally extending channels.

7. The device of Claim 6, wherein the plurality of compliant contact elements comprises:

5 a first plurality of contact elements, each having a lead portion adjacent a first one of the side walls; and

a second plurality of contact elements, each having a lead portion adjacent a second one of the side
10 walls;

wherein the contact elements of the first plurality and the contact elements of the second plurality are spaced along their respective side walls so as to be staggered with respect to each other.

15 8. The device of Claim 1, wherein the electrical contact portion is configured as a substantially finger-shaped portion having a rounded tip extending through the channel outwardly from the exposed surface.

9. The device of Claim 8, wherein the finger-shaped portion is supported within the housing by the supporting portion, and wherein the supporting portion is mounted within the housing so as to be cantilevered, whereby the supporting portion flexes inwardly toward the mounting surface in response to the compression of
25 the tip of the finger-shaped portion.

10. The device of Claim 9, wherein the supporting portion is a first supporting portion that provides cantilevered support for a first side of the finger-shaped portion in a first one of the interior wall
30 surfaces, and wherein each of the compliant contact elements further comprises a second supporting portion that provides cantilevered support for a second side of the finger-shaped portion in a second one of the

interior wall surfaces.

11. The device of Claim 10, wherein the interior wall surfaces define an opposed pair of horizontal shoulders within the housing on opposite sides of the channel, and wherein each of the supporting portions has an upper surface seated against an adjacent one of the shoulders.

12. A device for electrically connecting a first plurality of conductors on a first printed circuit board to a second plurality of conductors on a second printed circuit board, comprising:

a housing having a mounting surface configured to be mounted on the first printed circuit board, an exposed surface opposite the mounting surface, and at least one opposed pair of side walls extending between the mounting surface and the exposed surface, the side walls each having an interior wall surface;

a plurality of channels opening through the exposed surface, each of the channels having an interior defined by a bottom interior surface and the interior wall surfaces of the side walls; and

a plurality of compliant contact elements mounted in the housing, each of the contact elements formed as an integral conductive element, comprising:

a first end portion disposed adjacent to the mounting surface so as to establish electrical contact with one of the first plurality of conductors when the housing is mounted on the first printed circuit board;

a lead portion extending from the first end portion along an adjacent one of the side walls toward the exposed surface and then through the

adjacent side wall and the interior wall surface of that wall into the interior of an adjacent one of the channels;

5 a supporting portion extending along the bottom interior surface of the adjacent one of the channels; and

an electrical contact portion flexibly joined to the supporting portion so as to form an acute angle therewith and extending outwardly from the adjacent one of the channels beyond the exposed surface so as to establish electrical contact with a corresponding one of the second plurality of conductors when the second printed circuit board is located adjacent to the first printed circuit board.

15 13. The device of Claim 12, wherein the electrical contact portion comprises:

an intermediate portion joined to the supporting portion along an arcuate bend; and

20 a second end portion joined to the intermediate portion at an angle that is approximately equal to, or slightly less than, a right angle, so as to form a rounded protuberance at the juncture between the intermediate portion and the second end portion, the rounded protuberance providing means for establishing the electrical contact with the corresponding one of the second plurality of conductors.

14. The device of Claim 12, wherein the supporting portion is substantially in contact with the bottom interior surface.

15. The device of Claim 12, wherein the supporting portion is spaced from the bottom interior surface.

16. The device of Claim 12, wherein the plurality of channels comprises a linear array of at least two laterally extending channels.

17. The device of Claim 16, wherein the plurality
5 of compliant contact elements comprises:

a first plurality of contact elements, each having a lead portion adjacent a first one of the side walls; and

a second plurality of contact elements, each
10 having a lead portion adjacent a second one of the side walls;

wherein the contact elements of the first plurality and the contact elements of the second plurality are spaced along their respective side walls
15 so as to be staggered with respect to each other.

18. A device for electrically connecting a first plurality of conductors on a first printed circuit board to a second plurality of conductors on a second printed circuit board, comprising:

20 a housing having a mounting surface configured to be mounted on the first printed circuit board, an exposed surface opposite the mounting surface, and at least one opposed pair of side walls extending between the mounting surface and the exposed
25 surface, the side walls each having an interior wall surface;

a plurality of channels opening through the exposed surface, each of the channels having an interior defined between the interior wall surfaces of
30 the side walls; and

a plurality of compliant contact elements mounted in the housing, each of the contact elements formed as an integral conductive element, comprising:

a first end portion disposed adjacent to the mounting surface so as to establish electrical contact with one of the first plurality of conductors when the housing is mounted on the first printed
5 circuit board;

a lead portion extending from the first end portion along an adjacent one of the side walls toward the exposed surface and then through the adjacent side wall and the interior wall surface of
10 that wall into the interior of an adjacent one of the channels;

a supporting portion extending within the interior of the adjacent one of the channels; and

a substantially finger-shaped portion
15 having at least one side flexibly joined to the supporting portion, the finger-shaped portion having a rounded tip and extending outwardly from the adjacent one of the channels beyond the exposed surface so as to establish electrical contact between the tip and a
20 corresponding one of the second plurality of conductors when the second printed circuit board is located adjacent to the first printed circuit board.

19. The device of Claim 18, wherein the finger-shaped portion is supported within the housing by the
25 supporting portion, and wherein the supporting portion is mounted within the housing so as to be cantilevered, whereby the supporting portion flexes inwardly toward the mounting surface in response to the compression of the tip of the finger-shaped portion.

30 20. The device of Claim 19, wherein the supporting portion is a first supporting portion that provides cantilevered support for a first side of the finger-shaped portion in a first one of the interior

23

wall surfaces, and wherein each of the compliant
contact elements further comprises a second supporting
portion that provides cantilevered support for a second
side of the finger-shaped portion in a second one of
5 the interior wall surfaces.

21. The device of Claim 20, wherein the interior
wall surfaces define an opposed pair of horizontal
shoulders within the housing on opposite sides of the
channel, and wherein each of the supporting portions
10 has an upper surface seated against an adjacent one of
the shoulders.





15

20

25

30

1/4

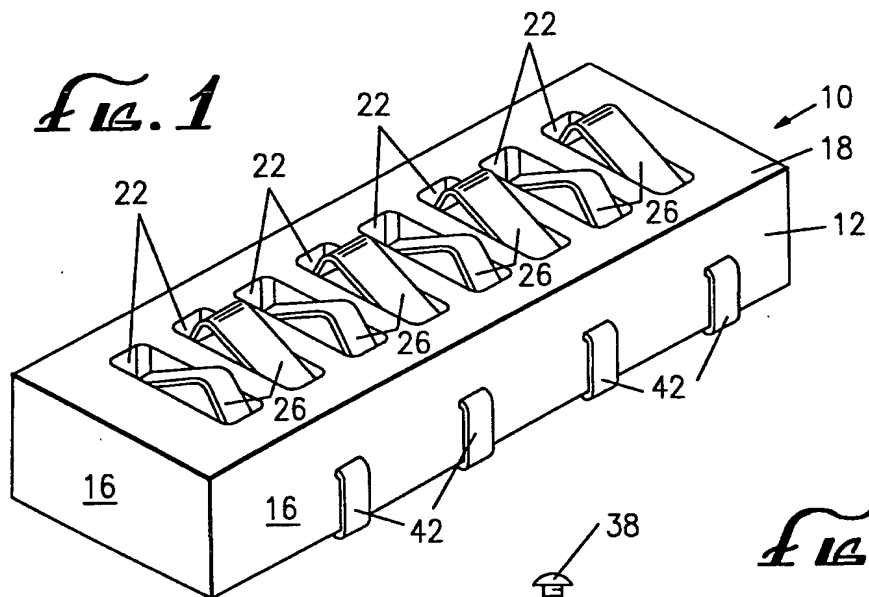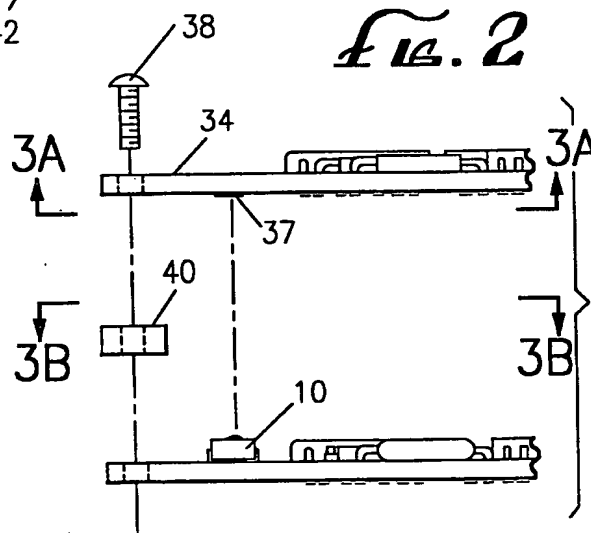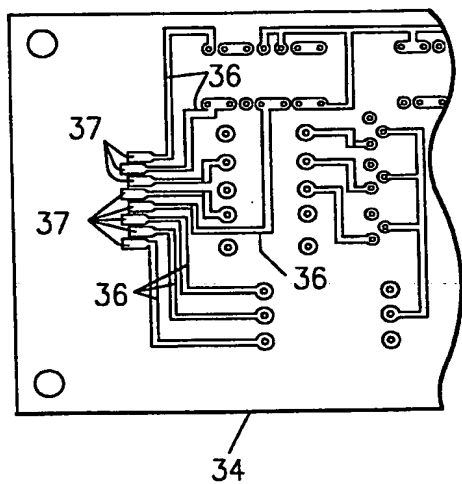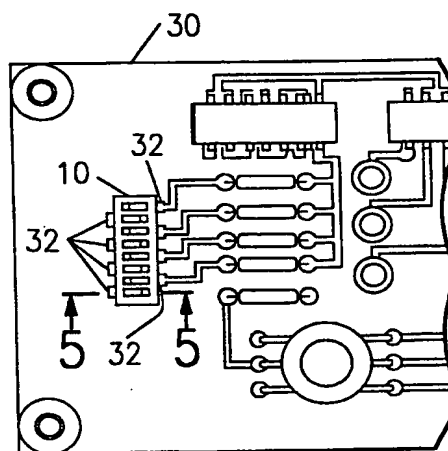Fig. 1*Fig. 2**Fig. 3A**Fig. 3B*

2/4

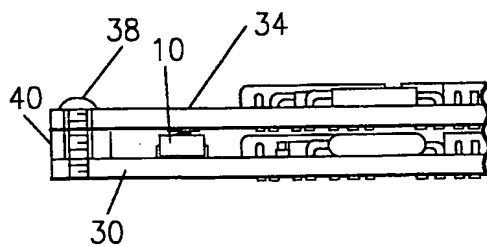


Fig. 4

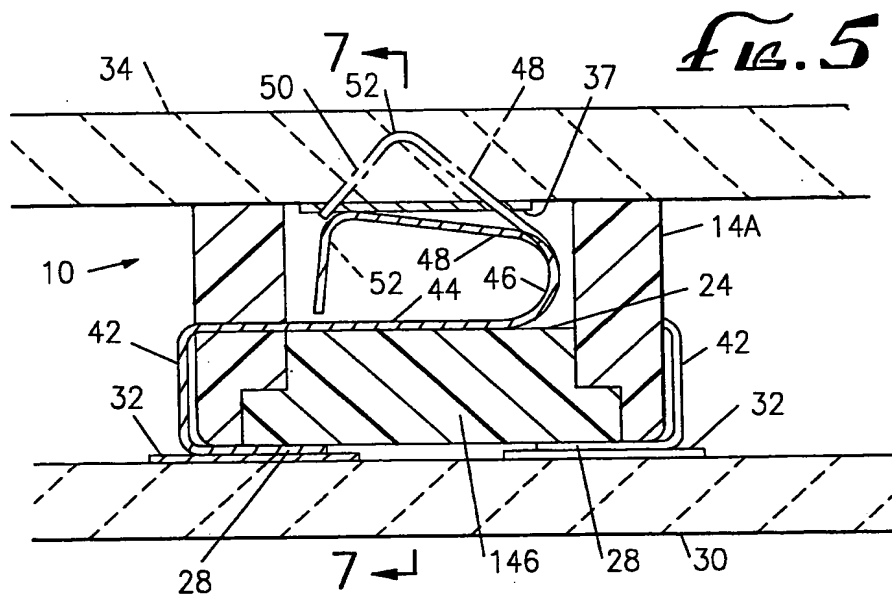


Fig. 5

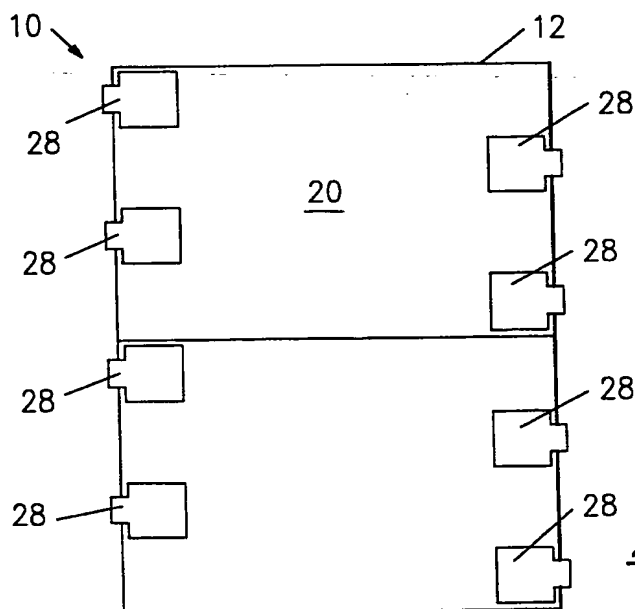


Fig. 6

3/4

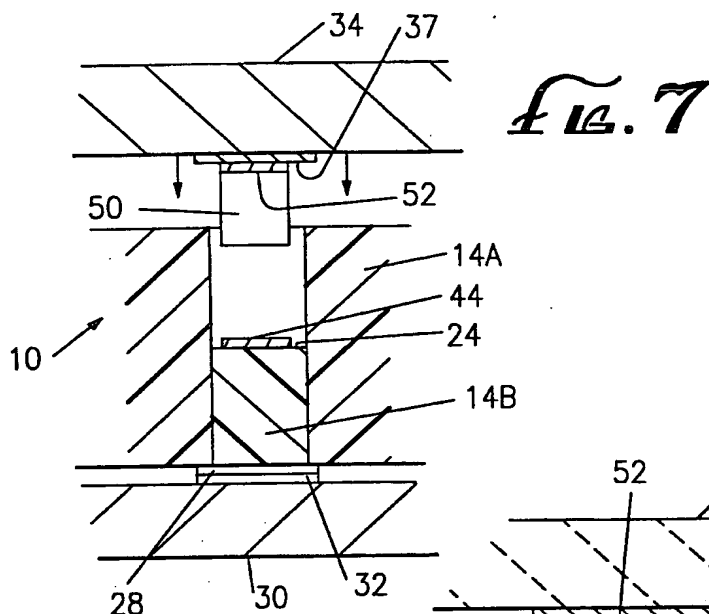


Fig. 8

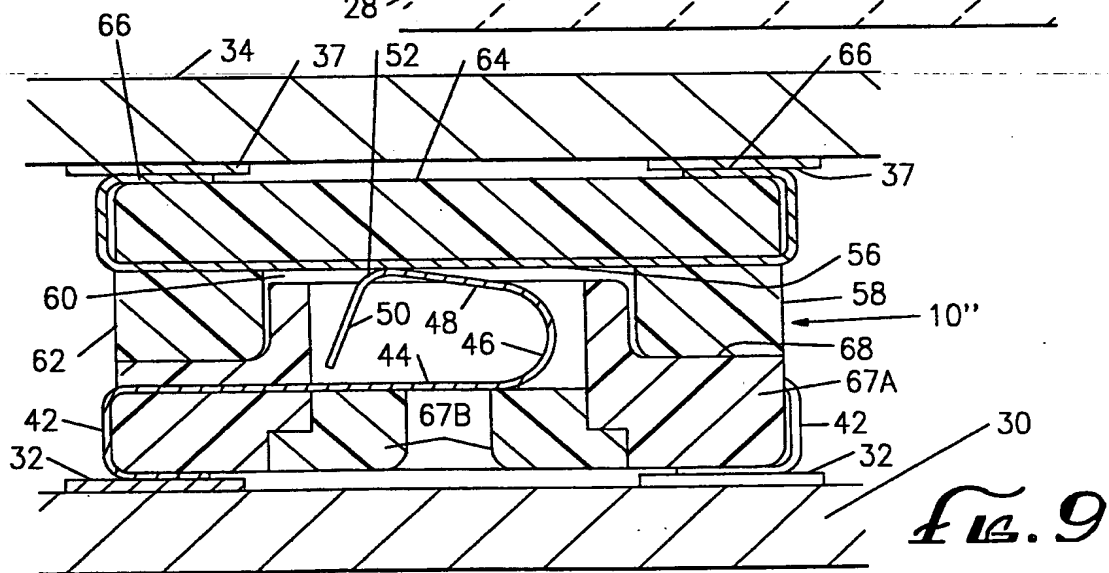
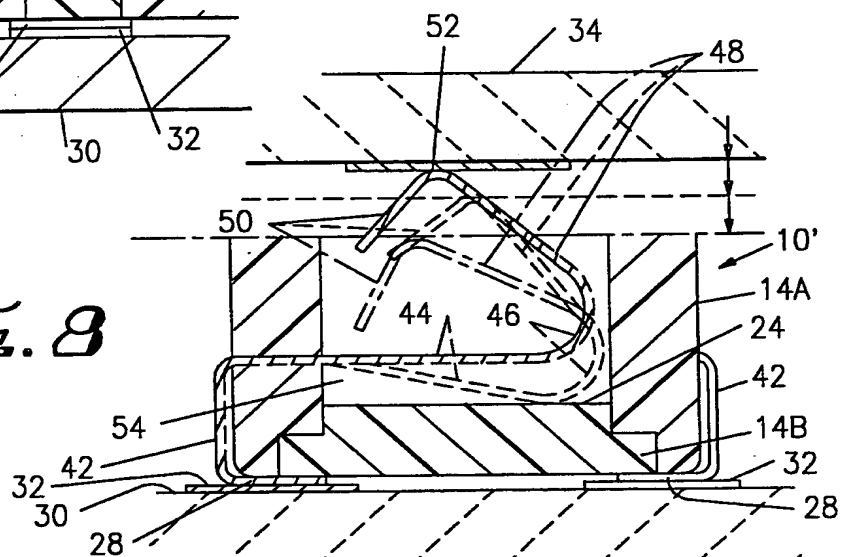


Fig. 10

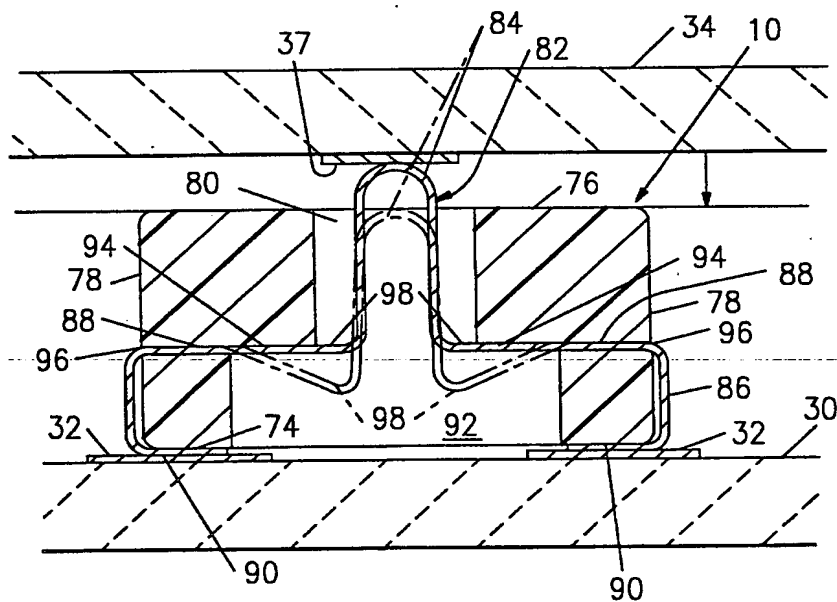
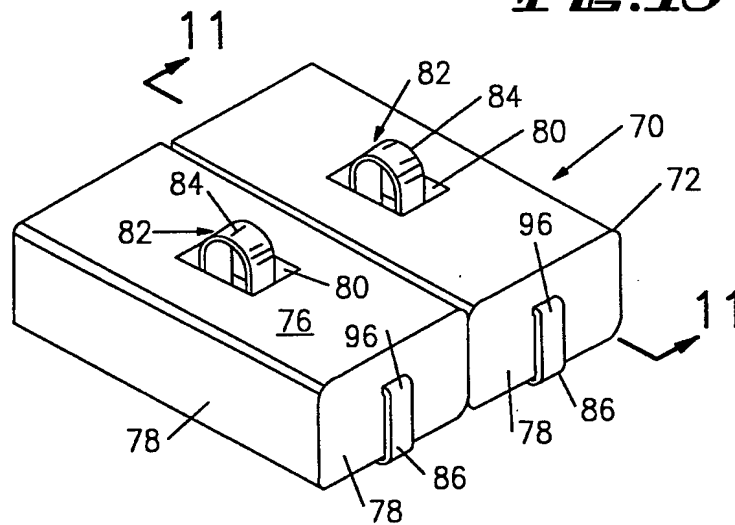


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/10735

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H05K 1/00

US CL :439/65, 66

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 439/65,66,69,71,72,74,76,83,91

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,927,369 (GRABBE ET AL) 22 MAY 1990 SEE THE ENTIRE DOCUMENT	1-21
A	US, A, 4,161,346 (CHERIAN ET AL) 17 JULY 1979 SEE THE ENTIRE DOCUMENT	1-21
A	US, A, 3,715,706 (MICHEL ET AL) 06 FEBRUARY 1973 SEE THE ENTIRE DOCUMENT	1-21
A	US, A, 5,199,889 (MCDEVITT, JR.) 06 APRIL 1993 SEE THE ENTIRE DOCUMENT.	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

09 JANUARY 1995

Date of mailing of the international search report

09 FEB 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

LARRY SCHWARTZ

Telephone No. (703) 308-1148

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.